




PCT/EP 0 37 0 9 1 1 3

2003



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

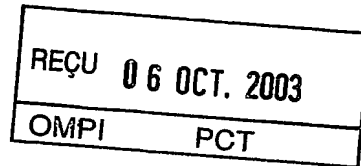

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

Signed

Dated 14 July 2003

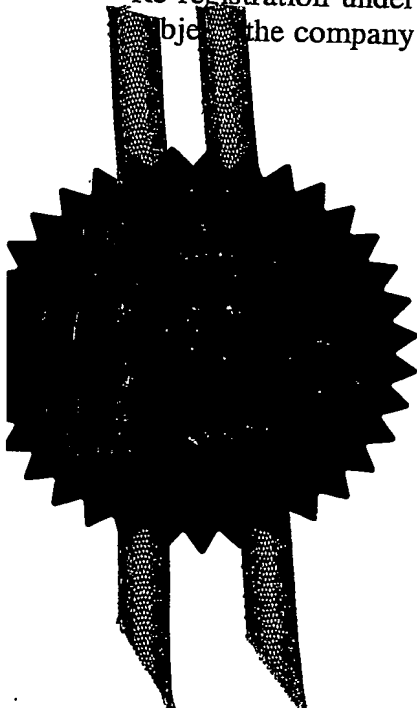

**BEST AVAILABLE COPY**

An Executive Agency of the Department of Trade and Industry

The  
Patent  
Office

THE PATENT OFFICE

20 AUG 2002

RECEIVED BY FAX

S.3/13

1/77

**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)*

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH**1. Your reference**

MB2-0503

**2. Patent application number***(The Patent Office will fill in this part)*

0219347.2

20AUG02 E742240-1 003051

00 0.00-0219347.2

**3. Full name, address and postcode of the or of each applicant *(underline all surnames)***MBT HOLDING AG  
Vulkanstrasse 110  
CH-8048 Zürich  
SwitzerlandPatents ADP number *(if you know it)*

7875891001

If the applicant is a corporate body, give the country/state of its incorporation

Switzerland

**4. Title of the invention**

METHOD

**5. Name of your agent *(if you have one)***"Address for service" in the United Kingdom  
to which all correspondence should be sent  
*(including the postcode)*Mr. P. Brown  
FEB MBT  
Albany House  
Swinton Hall Road  
Swinton  
MANCHESTER M27 4DTPatents ADP number *(if you know it)*

7178510001

**6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number**

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)***7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application**

Number of earlier application

Date of filing  
*(day / month / year)***8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:***

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d)*

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s) 1

Abstract 1

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 20.08.02

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. P. Brown, FEB MBT  
 (0161) 794 74 11

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**Patents Form 1/77**

DUPLICATE

1

## METHOD

This invention relates to a method of lubrication of cementitious compositions delivered via conduits and to a composition for use with this method.

5

Cementitious compositions such as concrete and mortar sometimes have to be conveyed to a use site via a conduit such as a tube, pipe or hose. Typical examples of such conveying are the pumping of concrete for placing by spraying or by dropping into a shaft, such as a mine shaft. Cementitious compositions for such applications are generally quite thick and viscous, and they can easily cause blockages in the conduit or prove difficult to pump, especially at the beginning of pumping. In order to start them flowing in the conduit, a so-called "start up" composition or "line lubricant" is added to the conduit prior to the addition of the cementitious composition – if a pump is involved, this is often called a "pump primer".

15 Traditionally, this composition has been a relatively fluid cement slurry, typically 50:50 water/cement by weight. This works well, but it has several drawbacks. One of these is that quite large amounts (up to 120 Kg) may be needed. Even when the amount is a reasonable 30 Kg, there is still the necessity of handling cement powder and mixing the cement slurry on site, often in less-than-ideal conditions. Moreover, if pump priming is involved, the slurry must be prepared prior to addition to a feed hopper adjacent to the pump – it is not possible to mix cement powder and water in the hopper, as the cement powder initially sinks to the floor of the hopper and slurry formation is nearly impossible.

25 There has been interest in developing lubricating compositions that are not cement slurries, that can be dissolved or dispersed quickly in water and that avoid the disadvantages previously mentioned. Some materials have been used successfully in this application, but these have usually been liquid, generally mineral slurries, and their liquid natures bring their own handling problems, plus the possibility of stability and shelf life problems. There exists a need in the art for a solid lubricating composition that will overcome the disadvantages of the known art.

30

It has now been found that a particular solid composition dissolves rapidly and completely in water and improves considerably the delivery of a cementitious composition through a conduit. The invention therefore provides a method of lubrication of the passage of a cementitious composition through a conduit, comprising the addition to the conduit prior to addition thereto of the cementitious composition of an aqueous solution of a solid lubricating composition consisting essentially of (i) alkali metal carbonate or bicarbonate, (ii) poly(ethylene oxide), and (iii) anionic sulphate surfactant.

The alkali metal carbonate or bicarbonate may be a single carbonate or bicarbonate or a mixture of such carbonates or bicarbonates. While both carbonates and bicarbonates give equal performance, bicarbonates are preferred because the lubricating compositions including them have a lower pH (typically 8-8.5, as opposed to the approximately 12 obtained with carbonates), making them more pleasant to handle. The preferred material is sodium bicarbonate. The carbonate or bicarbonate is present in the lubricating composition to the extent of from 80 – 95% by weight of the total solid lubricating composition. The material is readily available in a variety of solid forms.

The poly(ethylene oxide) (PEO), which may be a single PEO or a mixture of PEOs, is a high molecular weight, having a weight-average MW of from 500,000 – 8,000,000 (preferably from 2,000,000 – 5,000,000). Such materials are readily commercially available, for example, the "Polyox" (trade mark) materials of Union Carbide Corp. The PEO is present in the lubrication composition to the extent of from 1-10%, preferably from 4-6%, solids by weight of the total lubricating composition.

The third essential component is at least one anionic sulphate surfactant. There is available a wide range of such materials, and two or more may be used. The preferred surfactant is an alkali metal lauryl sulphate, more preferably sodium lauryl sulphate. This is used in the lubricating composition to the extent of from 0.5–5%, more preferably from 1-2%, solids by weight of the lubricating composition.

30

The invention therefore also provides a lubricating composition consisting essentially of a solid mixture of from 80-95% of at least one alkali metal bicarbonate, from 1-10% of at least

one poly(ethylene oxide) and from 0.5-3% of an alkali lauryl sulphate, all percentages being by weight of the total lubricating composition.

5 An optional, preferred, additional component is a water-soluble organic-functional acidic substance. By "organic-functional acidic substance" is meant any solid, water-soluble acidic compound that will dissolve in water to give a pH of less than 7 and that has organic content, for example, an organic functional group. Such acidic substances may be traditional organic acids, such as carboxylic acids, but this is not necessarily the case. A specific example of an organic-functional acidic substance useful in this invention is aminotri(methylenephosphonic  
10 acid), sold commercially, for example as "Dequest" (trade mark) ex Monsanto. Any such organic-functional acidic substance will work in this invention. It is possible to use more than one such acidic substance, but the preferred acidic substance is citric acid, used alone.

15 When such an acidic substance is present, it may be present to the extent of up to 10% by weight of the lubricating composition. It is preferably present to the extent of from 4 - 6%.

Although it is possible to add the individual components to water, it is much more convenient (and preferred) to add them as a single admixture. The preferred lubricating composition dissolves rapidly in water (preferably within 60 sec, more preferably within 30  
20 sec) to give a solution with a pH of about 8-8.5. The solid lubricating composition is advantageously packaged in discrete, known amounts, ready for use, for example, in suitable containers, such as plastic bags or sachets. In a further embodiment, these containers may be water-soluble, and an appropriate number of bags may be added. In addition to the convenience of dosing (by simply adding the necessary number of containers), any dust  
25 hazard is removed.

The quantity of lubricating composition used in any given situation will depend on the conditions in that situation. Such conditions vary widely, but in every case the skilled person can ascertain an appropriate amount by simple experimentation. Typically, for the priming of  
30 a concrete pump, the total quantity of aqueous solution will be 20 Kg, containing typically from 1-2% by weight of lubricating composition.

The lubricating compositions for use in this invention are outstanding in lubricating performance and allow easier pumping or dropping of cementitious compositions.

The invention is further described with reference to the following non-limiting example.

5

Preparation of lubricating composition

The following materials are blended.

10	sodium bicarbonate*	93.5% (wt. solids)
	poly(ethylene oxide)**	5%
	sodium lauryl sulphate	1.5%

\* Solvay 0/50

15 \*\* "Polyox" (trade mark) 301, ex Union Carbide Corp., weight-average MW 4,000,000.

The resulting composition is packed into waterproof, easily-tearable plastic bags, each bag holding 200 gm.

20 Testing of lubricating composition

Two identical batches of concrete mix for pumping are prepared. The mix design is

	ordinary Portland cement (HCB Normo 4, CEM I)	42.5 Kg.
25	crushed aggregate 0-4mm	1200 Kg.
	crushed aggregate 4-8mm	455 Kg.

Both mixes are pumped through a standard 8 cm. hose by means of a pump having an adjacent feed hopper, a type well known to the art.

30

In one case, 20 Kg. water is added to the hopper and the contents of a single bag containing 200 gm lubricating composition as hereinabove described is added to the water and the

5

paddles in the hopper are operated to agitate and dissolve the composition. The composition dissolves completely within 60 sec. This solution is then pumped and a batch of the concrete mix is added to the hopper and pumped immediately afterwards. The concrete mix flows smoothly through the pump.

5

The other concrete batch is pumped using the traditional cement slurry. This also flows smoothly. However, this requires the prior mixing of a cement slurry consisting of a 50:50 weight blend of ordinary Portland cement and water. 30 kg of this slurry is then added to the hopper and pumped, the concrete batch being pumped immediately afterwards. More

10 material is needed to prime the pump and more time and effort is required to achieve the same results as those obtained by the lubricating composition hereinabove described.



Claims:

1. A method of lubrication of the passage of a cementitious composition through a conduit, comprising the addition to the conduit prior to addition thereto of the cementitious composition of an aqueous solution of a solid lubricating compositions consisting essentially of (i) alkali metal carbonate or bicarbonate, (ii) poly(ethylene oxide), and (iii) anionic sulphate surfactant.
2. A lubricating composition consisting essentially of a solid mixture of from 80-95% of at least one alkali metal bicarbonate, from 1-10% of at least one poly(ethylene oxide) and from 0.5-3% of an alkali lauryl sulphate, all percentages being by weight of the total lubricating composition.
3. A lubricating composition according to claim 2, in which the composition additionally contains a water-soluble organic-functional acidic substance.

7

# ABSTRACT

A method of lubrication of the passage of a cementitious composition through a conduit, comprising the addition to the conduit prior to addition thereto of the cementitious composition of an aqueous solution of a solid lubricating composition consisting essentially of (i) an alkali metal carbonate or bicarbonate, (ii) poly(ethylene oxide), and (iii) anionic sulphate surfactant. The use of this composition allows the convenient achievement of flow, without the necessity to mix sometimes substantial quantities of cement slurry *in situ*.

10

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**